

# MPL "S" series

# MPL 480S

Max. power 480 kVA



### MPL 480S

a.c. output	<b>400 V</b>	stand-by <sup>(1)</sup>	480 kVA
50 Hz. 3~ph		prime <sup>(2)</sup>	450 kVA
power factor			

fuel	Diesel
starting	Electric

alternator	Synchronous
voltage regulator	Electronic
voltage stability	2%
frequency stability	2%

engine		Deutz
type		BF8M 1015 C G2
intake		Turbo/intercooler
cooling		Water
displacement	c.c. - cu.in	15874 - 968
cylinders		8
prime power	HP - kW	555 - 408
RPM		1500

tank capacity	L - gal	350 - 98
3/4 load operating hours	h	4,7

sound power level	LwA	97
acoustic pressure at 7 mt.	dB(A)	72

grade of protection	IP23
---------------------	------



DIMENSIONS	L	4900 - 193	mm - in.
	W	1650 - 65	mm - in.
	H	2833 - 111	mm - in.
WEIGHT		6500 - 9330	kg - lbs

**PRONK** MACHINERY *Your partner in power solutions - Worldwide delivery*  
 Veilingweg 70 - 1749 EJ Warmenhuizen - The Netherlands - Tel.: (+31)226-753742 - Email: info@pronk-machinery.nl

<sup>(1)</sup> **Stand-by power:**  
power available for emergency

<sup>(2)</sup> **Prime power:** maximum power  
available at variable loads for an  
unlimited amounts of hours

# MPL 480S

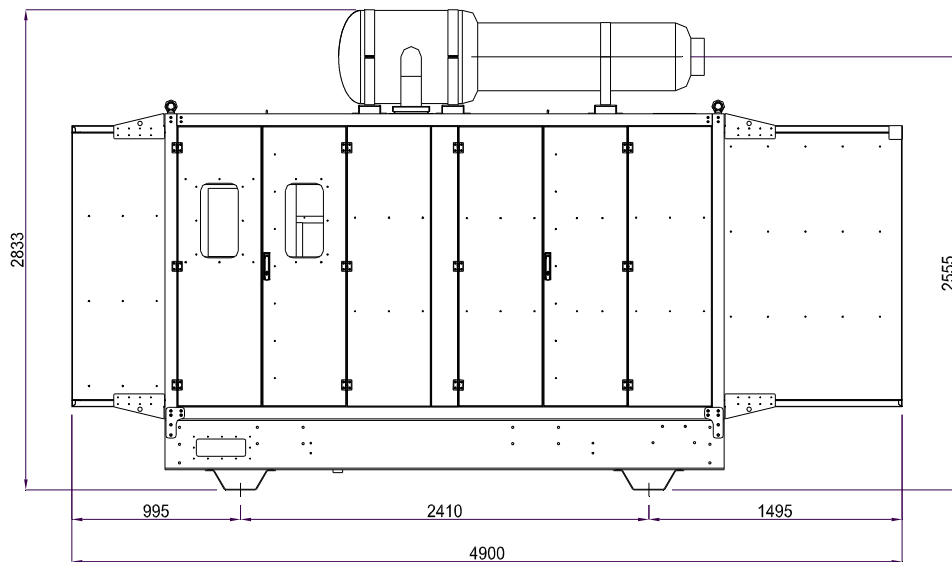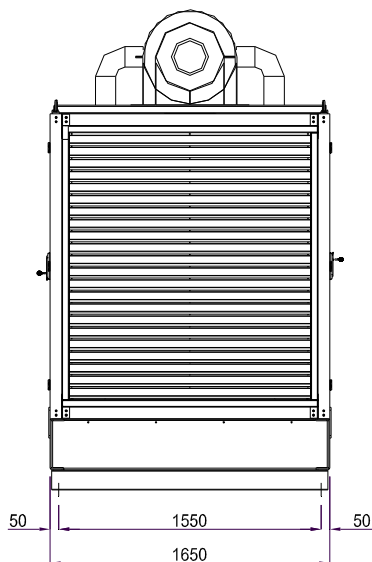

*This drawing is only a reference and is not indicated for the installation. For more information, you may contact your local dealer or **mase** generators S.p.A..*

***mase** generators S.p.A. reserves the right to change the design or specifications without notice and without any obligations or liability whatsoever. For more information, you may contact your local **mase** dealer.*