




		FX 50H/A		FX 5.4H/A	
a.c. output	230 V	¹ max.kW	3,5	3,5	
	50 Hz 1~	² cont.kW	3,2	3	
power factor		cos ø	1	1	
a.c. output	400 V	max .kVA			5
	50 Hz 3~	cont .kVA			4,1
power factor		cos ø			0,8
fuel starting			Gasoline		
			electric		
alternator			synchronous		
engine cooling system displacement n° cylinders prime power R.P.M.		c.c.	HONDA GX270		
			air		
			270		
			1		
		HP	8,2		
			3000		
fuel tank capacity		lt.	6		
¾ load operating hours		h	3		
sound power level		L _{WA}	99		
acoustic pressure at 7 mt.		dB(A)	74		

		FX 50H/A	FX 5.4H/A	
DIMENSIONS	L	725	725	mm
	W	515	515	mm
	H	585	585	mm
WEIGHT		78	88	kg


⁽¹⁾ **Stand-by power:**
power available for emergency

⁽²⁾ **Prime power:** maximum power
available at variable loads for an
unlimited numbers of hours

CONTROL PANELS


FX 50 H/A

- 1 Voltmeter 300V
- 2 Remote control connector
- 3 Single-phase outlet CEE 230V 16A
- 4 Single-phase outlet CEE 230V 16A
- 5 Differential magnetothermal switch

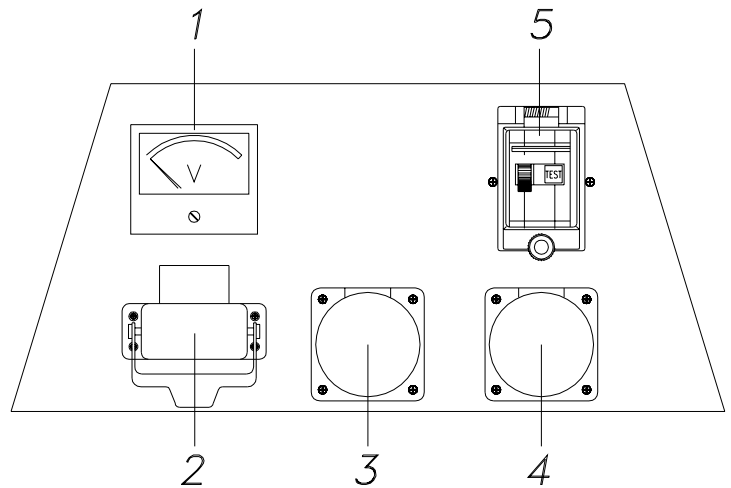

FX 5.4 H/A

- 1 Voltmeter 500V
- 2 Remote control connector
- 3 Three-phase outlet EC 400V 16A 3P+N+T
- 4 Single-phase outlet EC 230V 16A 2P+T
- 5 Differential switch 4P 25A
- 6 Magnetothermal switch 3P 6A-10A
- 7 Magnetothermal switch 1P 16A

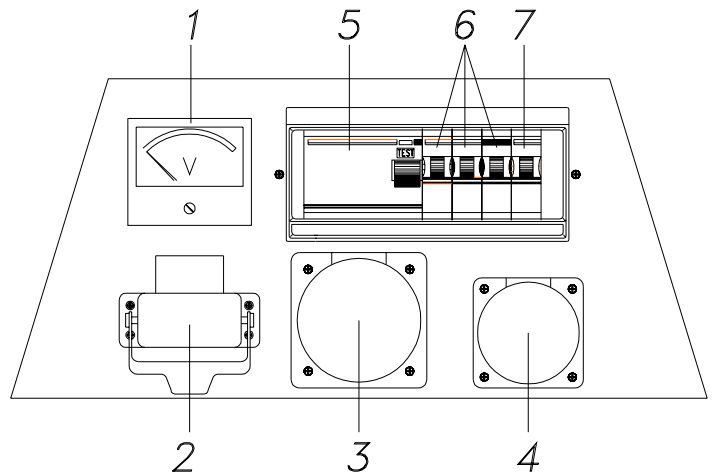

OPTIONAL

- Automatic control panel
- Remote control panel
- Undergear