

SILENT 5000 DM

Max. output 5 kW

standard
version



OPTIONAL
trolley



a.c. output	230 V	max. kW	5
50 Hz 1~		cont. kW	4,4
fattore di potenza			1
fuel starting		diesel electric	
alternator		synchronous	
engine cooling system		c.c.	Yanmar L100 AE
displacement			air
n. cylinders			406
max power		HP	1
R.P.M.			8,8
			3000
fuel tank capacity		lt.	16
3/4 load operating hours		h	11
dimentions		L _w A	91
weight		dB(A)	66

standard
version

DIMENSION	L	970	mm
	W	615	mm
	H	770	mm
WEIGHT		190	kg

Version with
trolley kit

DIMENSION	L	1300	mm
	W	810	mm
	H	810	mm
WEIGHT		200	kg

CONTROL PANELS

MANUAL CONTROL PANEL



- Warning lights: high engine temperature
low oil pressure
fault on battery charger
- Circuit breaker and earth fault device
- Socket breakers




- Start/stop key
 - Voltmeter
 - Hourmeter
 - Emergency stop button
-
- no. 1 EC socket 32A 230 V
 - no. 1 EC socket 16A 230 V

OPTIONAL: AUTOMATIC STARTING

- Emergency stop button
- Circuit breaker
- Digital genset control
- Power cables - terminal board

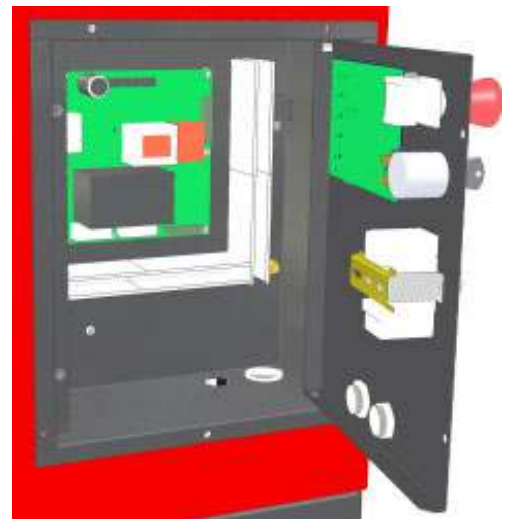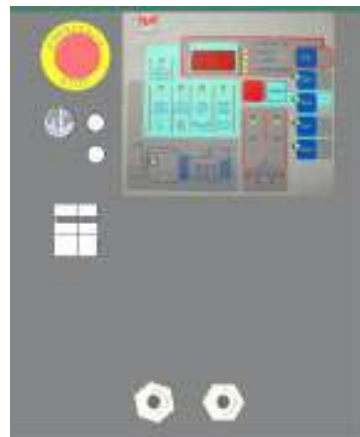

- Automatic Transfer Switch
mains/genset fixed on the panel

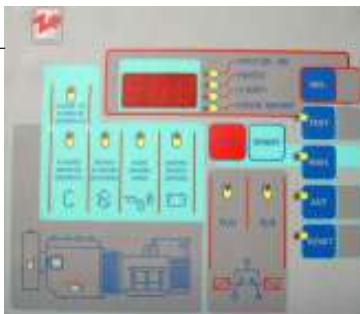

- Weekly automatic test
- no. 9 alarms
- no. 5 genset parameters
- no. 32 programming keys
- no. 7 operating mode

OPTIONAL : Remote control panel with 50 mt. cable